




FEMALE HEADER 0.8mm H=3.1mm SMT TYPE

SPECIFICATION



Current Rate:1 AMP
 Insulation Resistance:1000M Ω Min
 Contact Resistance:20m Ω Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C

MATERIAL

Insulator:Polyester,UL 94V-0
 © Standard:LCP
 Contact Pin:Phosphor Bronze
 Contact Plated:Gold Plated

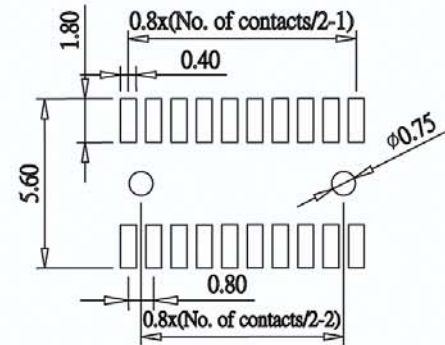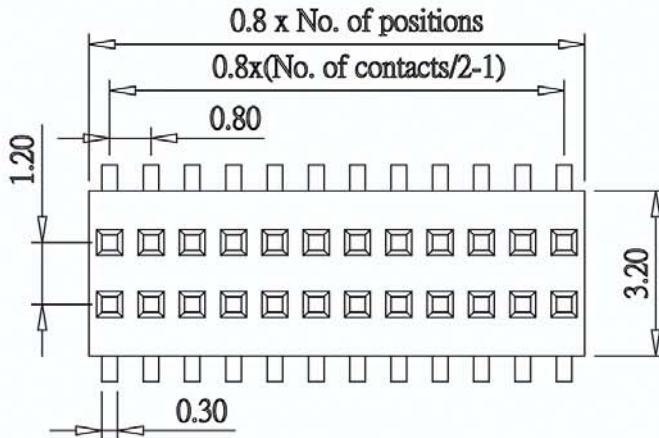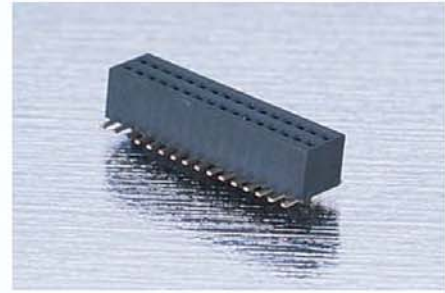

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

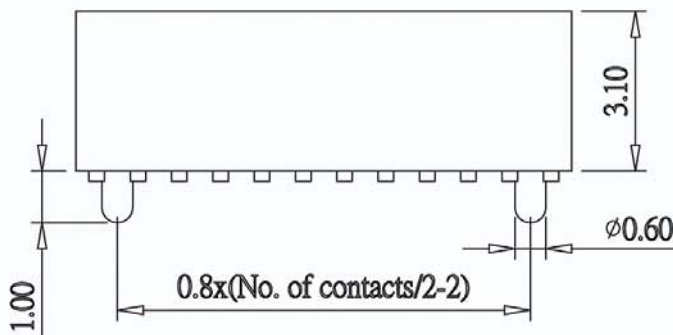

ORDER INFORMATION

