


# 1.25mm WAFER SMT STRAIGHT & SMT R/A TYPE




## SPECIFICATIONS

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze/Tin-plated  
 Solder Tabs: Phosphor Bronze/Tin-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1250MS-02TW-U	1.25	7.75
1250MS-03TW-U	2.50	9.00
1250MS-04TW-U	3.75	10.25
1250MS-05TW-U	5.00	11.50
1250MS-06TW-U	6.25	12.75
1250MS-07TW-U	7.50	14.00
1250MS-08TW-U	8.75	15.25
1250MS-09TW-U	10.00	16.50
1250MS-10TW-U	11.25	17.75
1250MS-11TW-U	12.50	19.00
1250MS-12TW-U	13.75	20.25
1250MS-13TW-U	15.00	21.50
1250MS-14TW-U	16.25	22.75
1250MS-15TW-U	17.50	24.00
1250MS-16TW-U	18.75	25.25
1250MS-17TW-U	20.00	26.50
1250MS-18TW-U	21.25	27.75



P.C.B LAYOUT


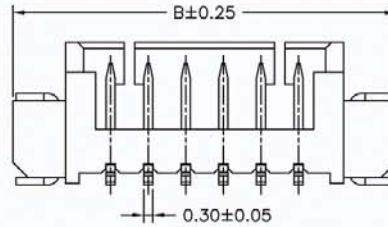
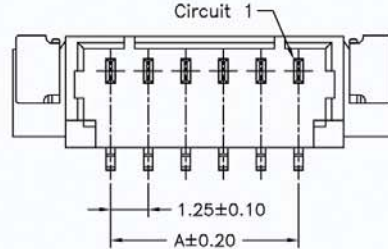


## Part No.:1250MS-XXTW-U


## SPECIFICATIONS

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze/Tin-plated  
 Solder Tabs: Phosphor Bronze/Tin-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1250MR-02TW-U	1.25	7.75
1250MR-03TW-U	2.50	9.00
1250MR-04TW-U	3.75	10.25
1250MR-05TW-U	5.00	11.50
1250MR-06TW-U	6.25	12.75
1250MR-07TW-U	7.50	14.00
1250MR-08TW-U	8.75	15.25
1250MR-09TW-U	10.00	16.50
1250MR-10TW-U	11.25	17.75
1250MR-11TW-U	12.50	19.00
1250MR-12TW-U	13.75	20.25
1250MR-13TW-U	15.00	21.50
1250MR-14TW-U	16.25	22.75
1250MR-15TW-U	17.50	24.00
1250MR-16TW-U	18.75	25.25
1250MR-17TW-U	20.00	26.50
1250MR-18TW-U	21.25	27.75

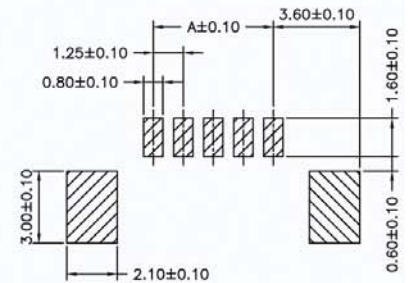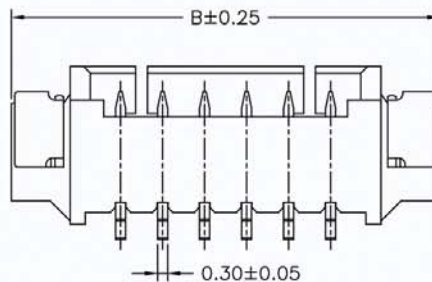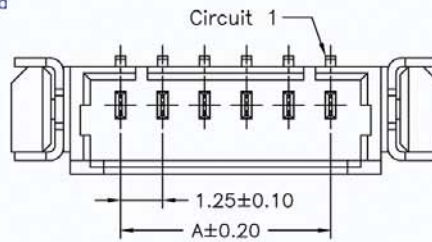

P.C.B LAYOUT



## Part No.:1250MR-XXTW-U