




1.25mm TERMINAL / HOUSING



SEC:A-A

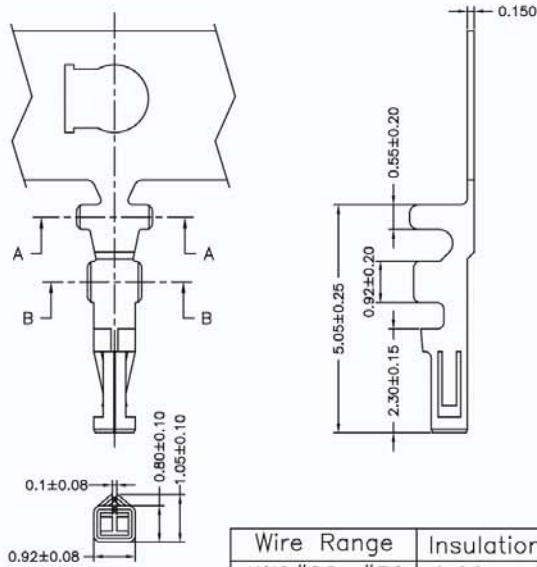

SEC:B-B

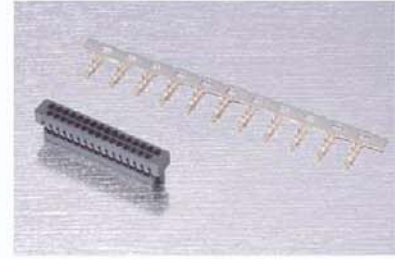

Part No.:1255-T-L



Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG#28-#32	0.90mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

SPECIFICATIONS



Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

PART NO.	Dimensions		
	A	B	C
1256H-05B-L	2.50	4.90	6.00
1256H-07B-L	3.75	6.15	7.25
1256H-09B-L	5.00	7.40	8.50
1256H-11B-L	6.25	8.65	9.75
1256H-13B-L	7.50	9.90	11.00
1256H-15B-L	8.75	11.15	12.25
1256H-17B-L	10.00	12.40	13.50
1256H-19B-L	11.25	13.65	14.75
1256H-21B-L	12.50	14.90	16.00
1256H-31B-L	18.75	21.15	22.25
1256H-41B-L	25.00	27.40	28.50

Part No.:1256H-XXB-L

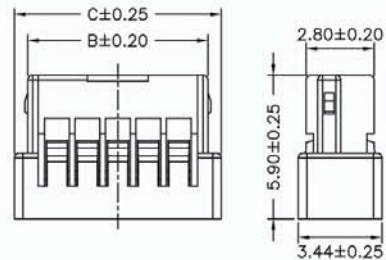

5,7,9,11 Contacts

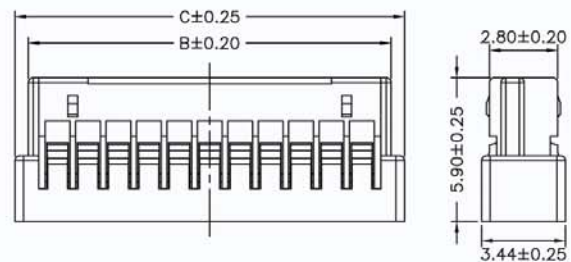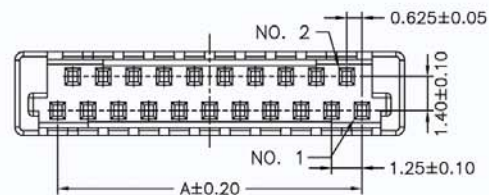

13,15,17,19,21,31,41 Contacts