

1.25mm WAFER SMT STRAIGHT / SMT R/A TYPE





SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Shell: Phosphor Bronze/Tin-plated
 Cap: Nylon 6T,UL94V-0,Natural(Black)
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

Part No.:1256MS-**XXTB**□-U

1: WITH POST
 2: W/O POST



CONTACT	Dimensions		
	A	B	C
21	12.50	16.85	11.25
31	18.75	23.10	17.50

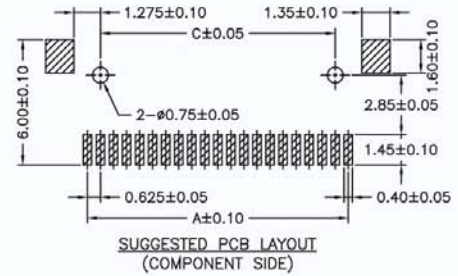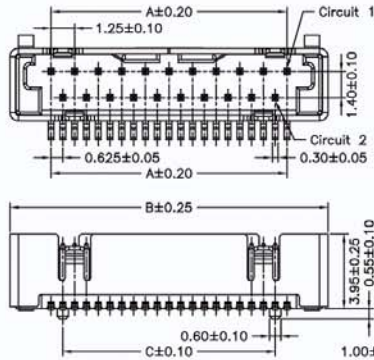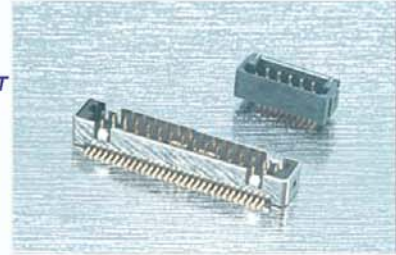



SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Shell: Phosphor Bronze/Tin-plated
 Cap: Nylon 6T,UL94V-0,Natural(Black)
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

PART NO.	Dimensions	
	A	B
1256MR-21TB-U	12.50	16.55
1256MR-31TB-U	18.75	22.80
1256MR-41TB-U	25.00	29.05

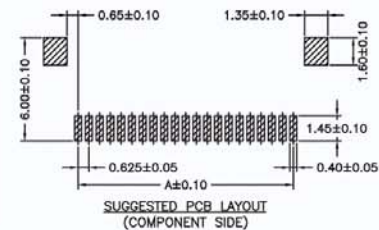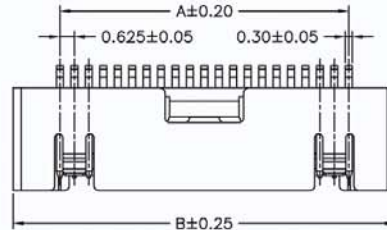




Part No.:1256MR-**XXTB**-U

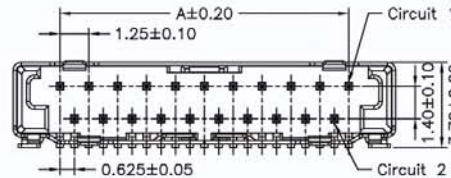

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Shell: Phosphor Bronze/Tin-plated
 Cap: Nylon 6T,UL94V-0,Natural(Black)
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

PART NO.	Dimensions	
	A	B
1256MRA-05TB-U	2.50	6.10
1256MRA-07TB-U	3.75	7.35
1256MRA-09TB-U	5.00	8.60
1256MRA-11TB-U	6.25	9.85
1256MRA-13TB-U	7.50	11.10
1256MRA-15TB-U	8.75	12.35
1256MRA-17TB-U	10.00	13.60
1256MRA-19TB-U	11.25	14.85
1256MRA-21TB-U	12.50	16.10
1256MRA-31TB-U	18.75	22.35
1256MRA-41TB-U	25.00	28.60

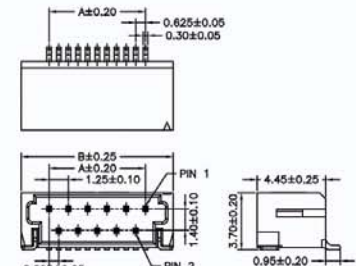

Part No.:1256MRA-**XXTB**-U

13,15,17,19,21,31,41 Contacts

5,7,9,11 Contacts